


AMS Retriever Mounting Instructions

610 & 611 AMS Retriever® Reels

1. Loosen thumb screw (4101) to detach female base mount (4102) from quiver/clamp assembly.
2. Keep the slab nut (4100) in the back of the female base mount.
3. Position the female base mount, as shown, over the sight holes on your bow riser and secure with the 3/8" screws (1009) provided.
4. Re-attach assembly to the female base mount but do not tighten.
5. Position reel on the bow at the desired location.
 - » Note how clamp and quiver allows the reel to move forward and back, up and down. Adjust reel so index finger easily reaches trigger while holding the bow. If Retriever is too far forward, reverse female base mount on the bow riser. If more distance is needed between bow riser and bottle, remove entire assembly, add 3/16" spacer, and attach with 7/8" screws provided.
6. When the AMS Retriever® is in the correct location, tighten the thumb screw completely.
7. After mounting the reel, thread the narrow end of the trigger guard into a hole on the riser. The Trigger Guard is the long rubber sleeve that helps prevent excess loose line from tangling with trigger. Simply push the narrow end into a hole on bow riser. If no hole is available, use a zip-tie to secure the end of the trigger guard to bow riser. This feature prevents any excess or loose line from getting behind the trigger.
8. To insert arrow into quiver, align arrow parallel to it, push in one end and then other. Arrow should be between the bottle and riser.
9. Use the line retainer before each shot to prevent line tangling with bow and components.

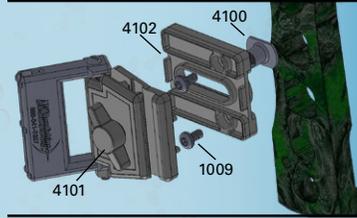

Mount Retriever to Bow



Trigger Guard & Line Retainer



Mounting to Traditional Bows

Our Traditional Mount Kit (M107) mounts any AMS Retriever® directly to a traditional bow without drilling! Simply position the mount on your bow with pins pointing toward bowstring. Stretch rubber straps around bow, cross over the mount and hook straps over pins. Install AMS Retriever® to bracket using 3/8" screws provided with reel. Follow mounting instructions above.



Installation of AMS Retrievers® on Crossbows

The Sleek-X Crossbow Mount can be used on crossbows that have standard quiver holes in the fore-grip (1 5/16" center to center). If your crossbow has a picatinny rail you'll also need the AMS Picatinny Rail Adapter. (sold separately)

Sleek-X Mounting Instructions

1. Remove the quiver from crossbow if necessary. The Sleek-X will fit a vertical or horizontal quiver hole pattern.
2. Detach handle of the Sleek-X from its mounting block and attach block to the crossbow using screws provided.
3. Re-attach Sleek-X handle to the mounting block and tighten T-screw.
4. Attach the AMS Retriever® to the Sleek-X handle. Adjust location to fit your hand by loosening the T-screw on Retriever.
5. Thread the trigger guard through the lower holes in the handle or use a zip-tie to attach it to the handle.
6. Attach bowfishing line directly to the ring on the crossbow bolt. The ring is used instead of EverGlide® Safety Slide® on crossbow bolts to better avoid interference with retention spring.
7. Insert bolt under retention spring. Keep ring and bowfishing line in front of the crossbow. The stop screw should be oriented to the side to clear retention spring. Before shooting, make sure the screw on crossbow bolt clears retention spring and other parts of crossbow.

